



Light signal ISSH-42S



Light signal type ISSH-42S is two-sides signal lamp designed to signalling hydrant point in mine.

TECHNICAL DATA:

ingress protection
supply voltage
rated current of matrix
weight without steel sheet hanger

IP54
230VAC, 50Hz
250 mA
1,2 kg


CONSTRUCTION

Light signal ISSH-42S is made as modules block consists two signal elements of LED matrix and connecting block to control installation. Modules are situated on metal frame with steel sheet, which allows the device to be mounted on mining excavation and drifts. Connecting module is equipped by cable glands which allows to connect supply and control cables to light signal. Light signal is made in LED technology, which hugely lowering costs of exploitation.

MODE OF OPERATION

Light signal ISSH-42S is made in LED technology and is equipped by two LED matrixes being green light sources. Light signal is designated to signalize location of hydrant. Light signal emits continuous light.

SAMPLE APPLICATION LIGHT SIGNAL ISSH-42S

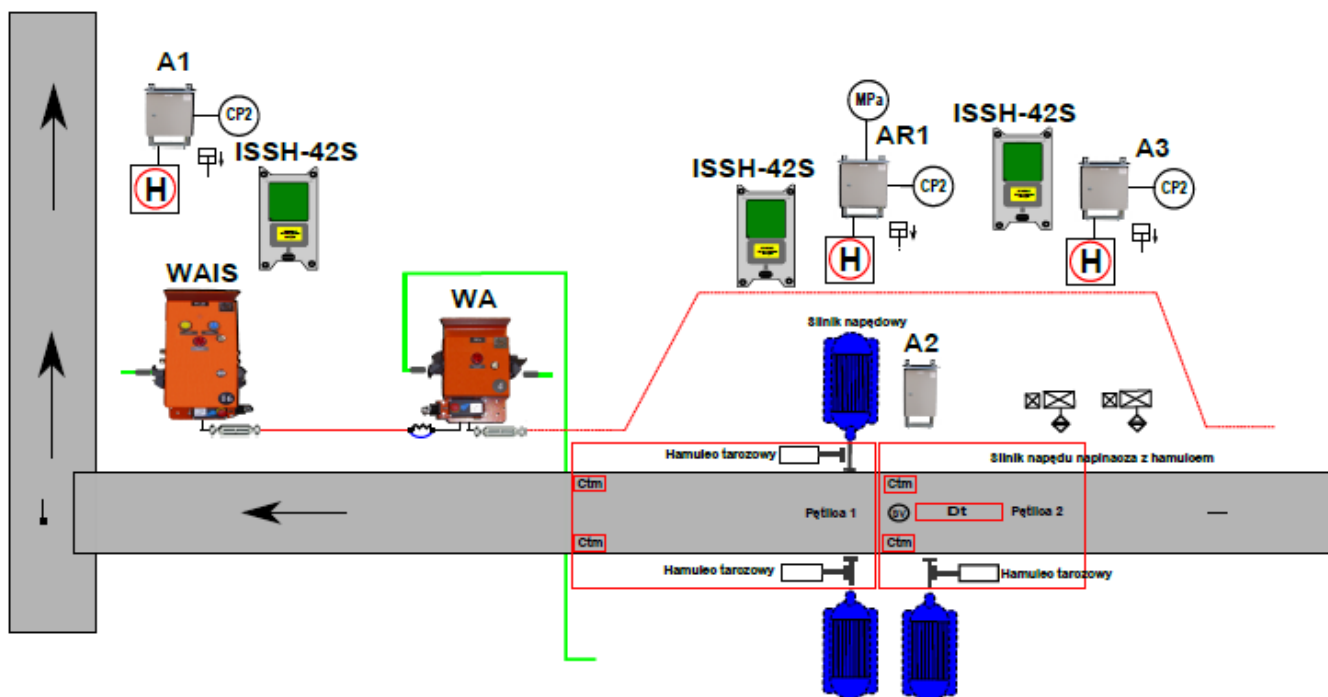

Sample application of light signals ISSH-42S on conveyor belt route section

Zamówienia należy składać pisemnie lub faxem na adres: